



FIG.1

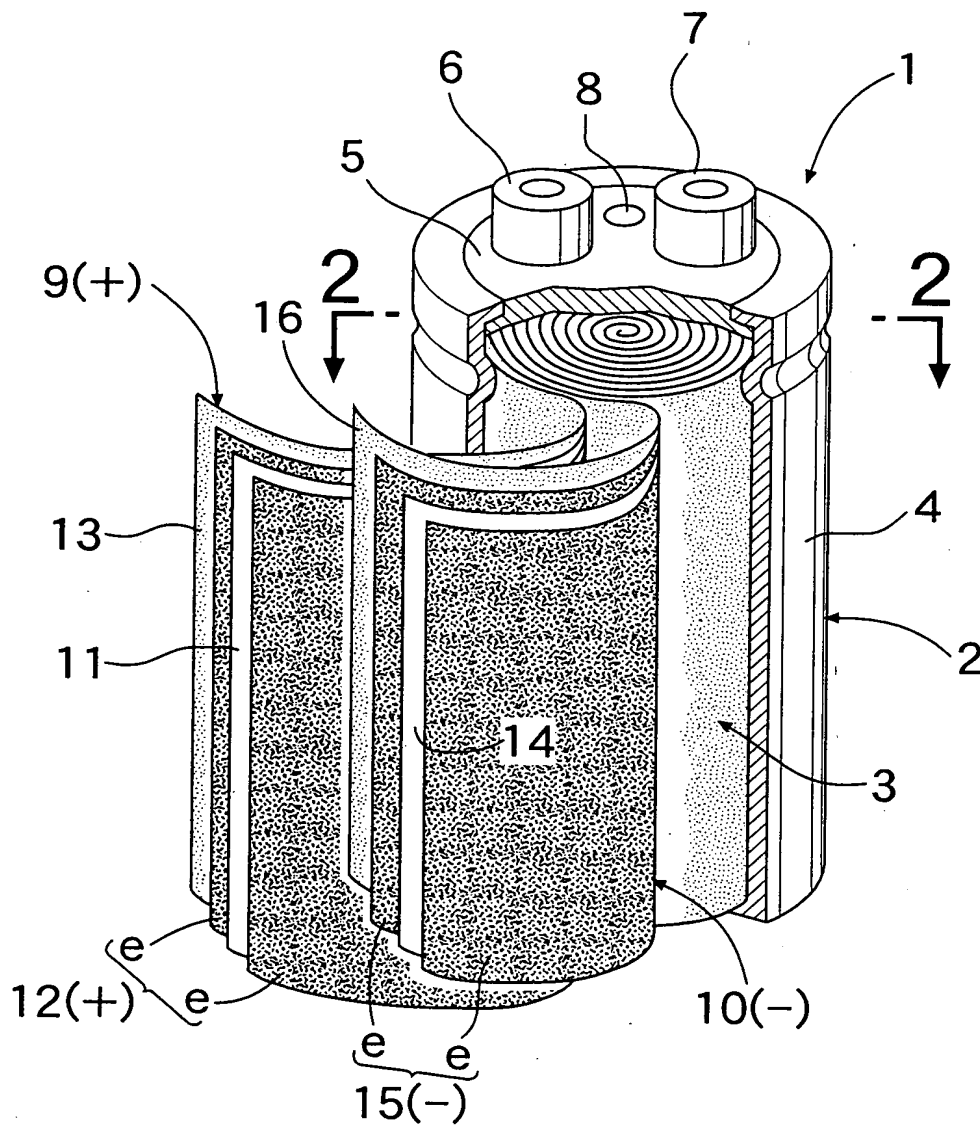

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

FIG.2

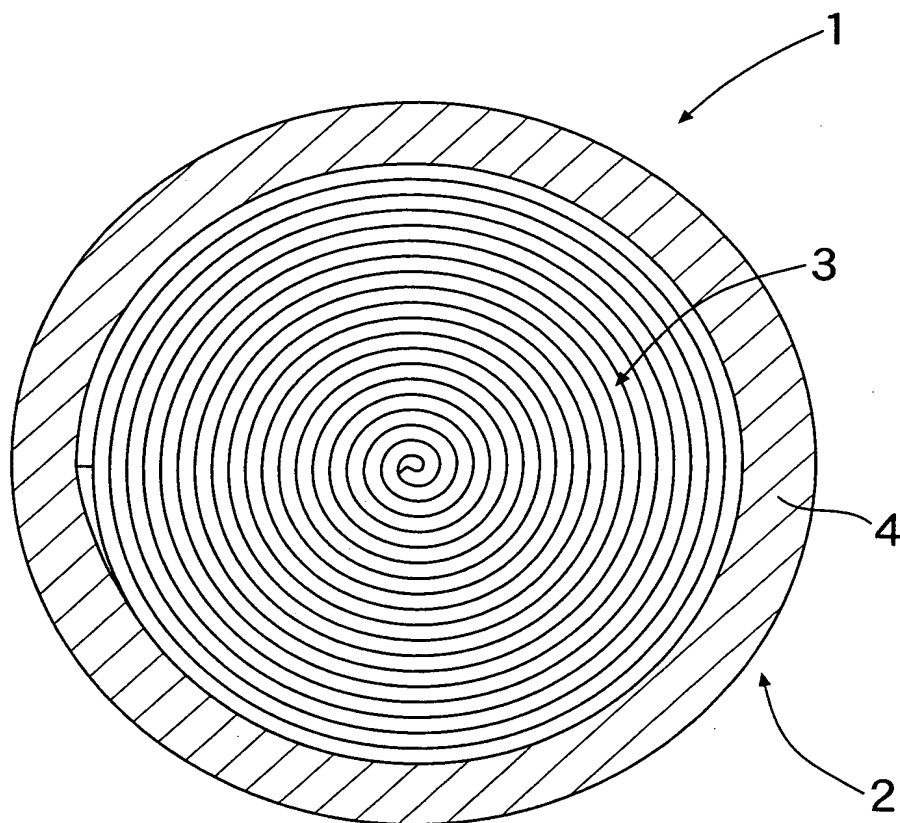

006080" 5E25E960

006080" SE25E960

FIG.3


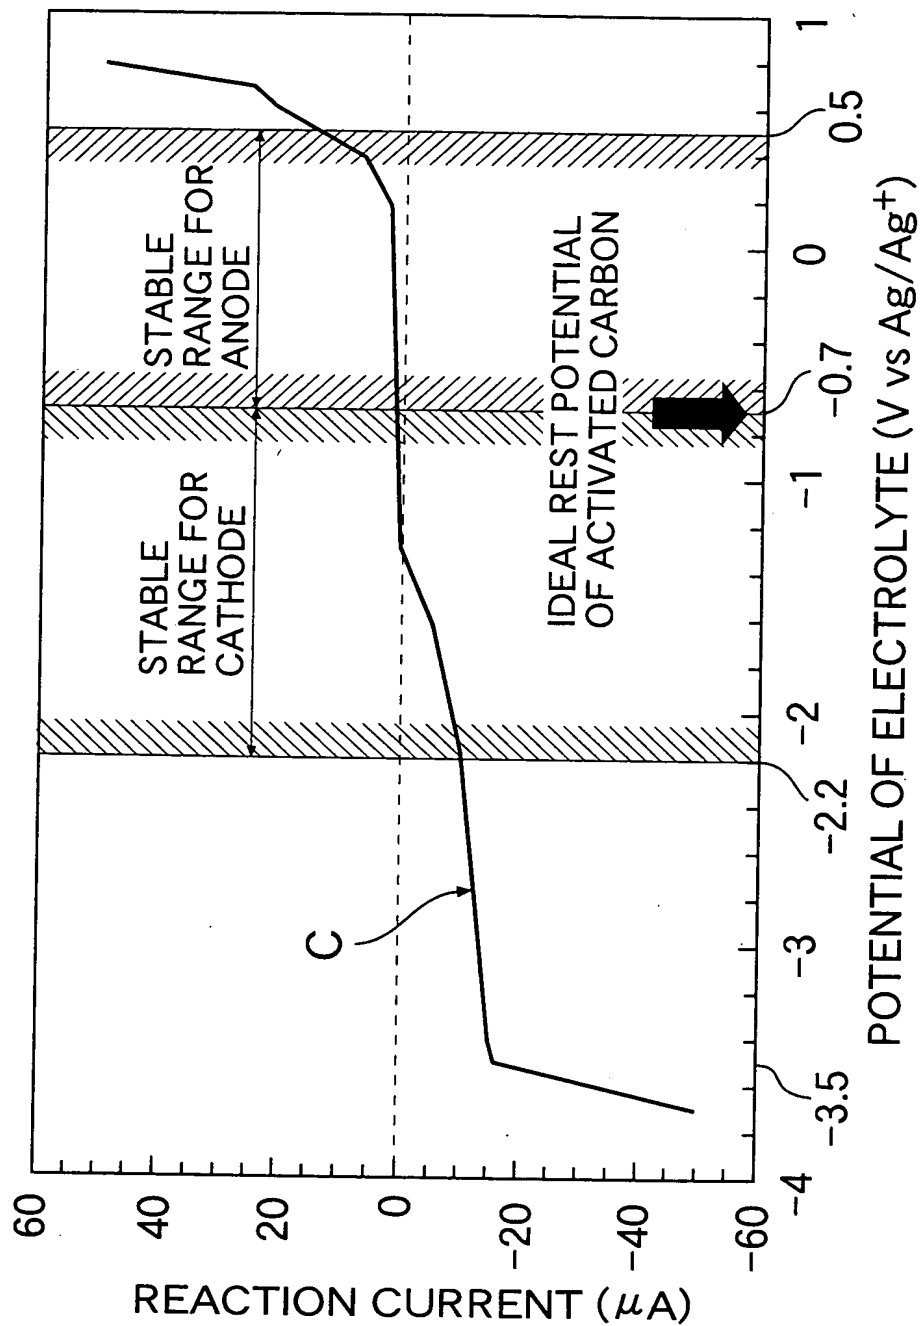


FIG. 4

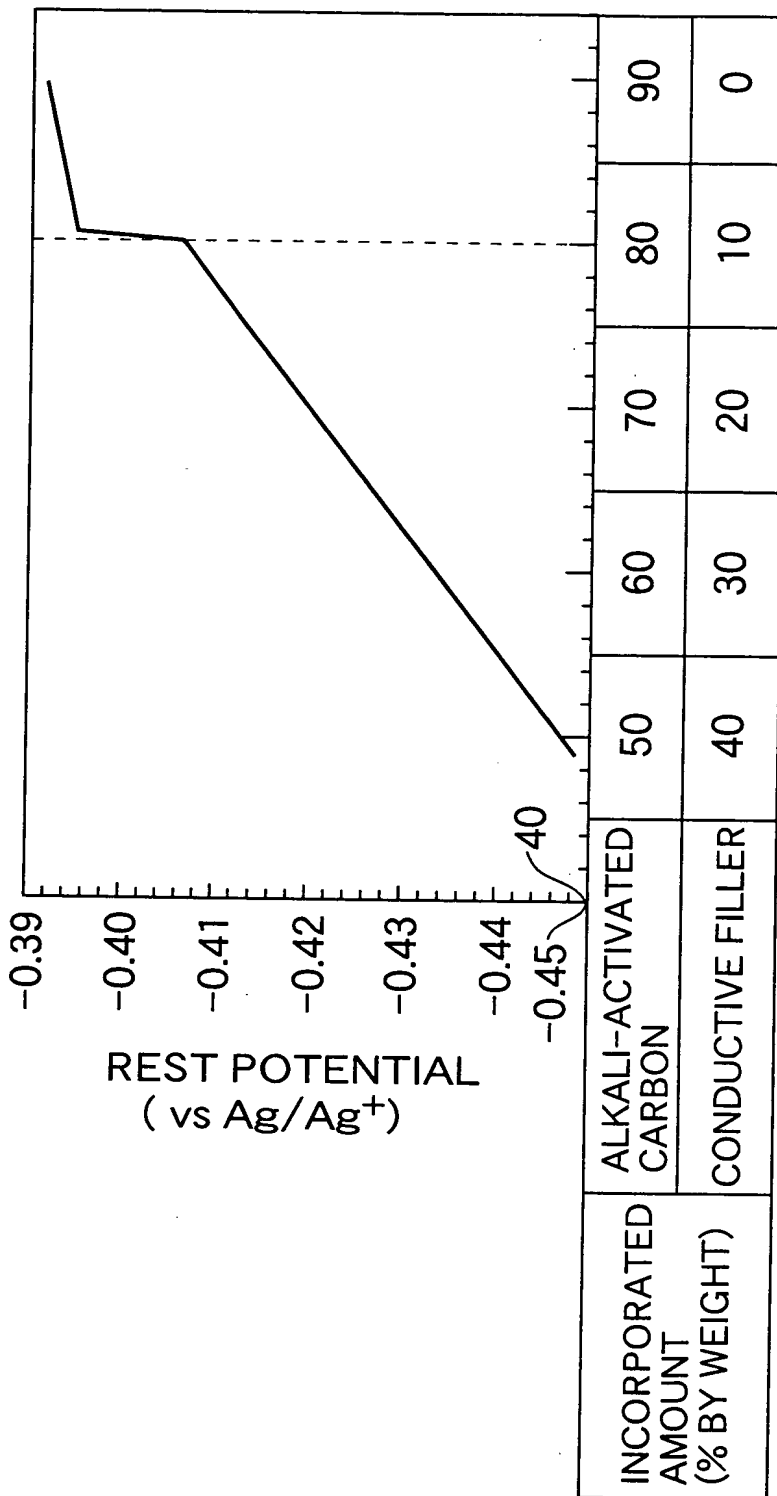

005080" 5E25E960

FIG.5


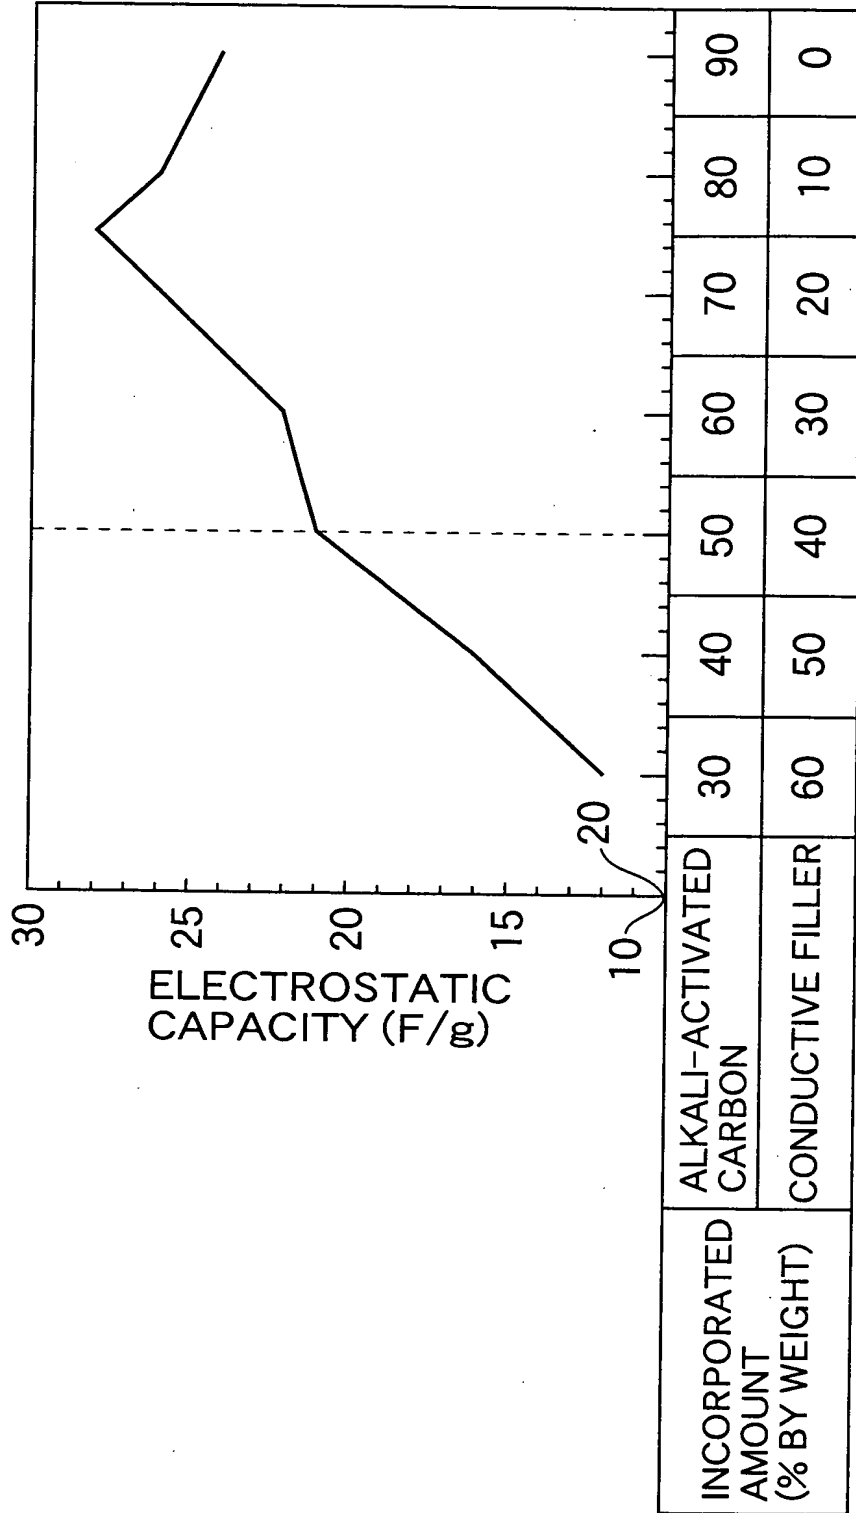


FIG.6

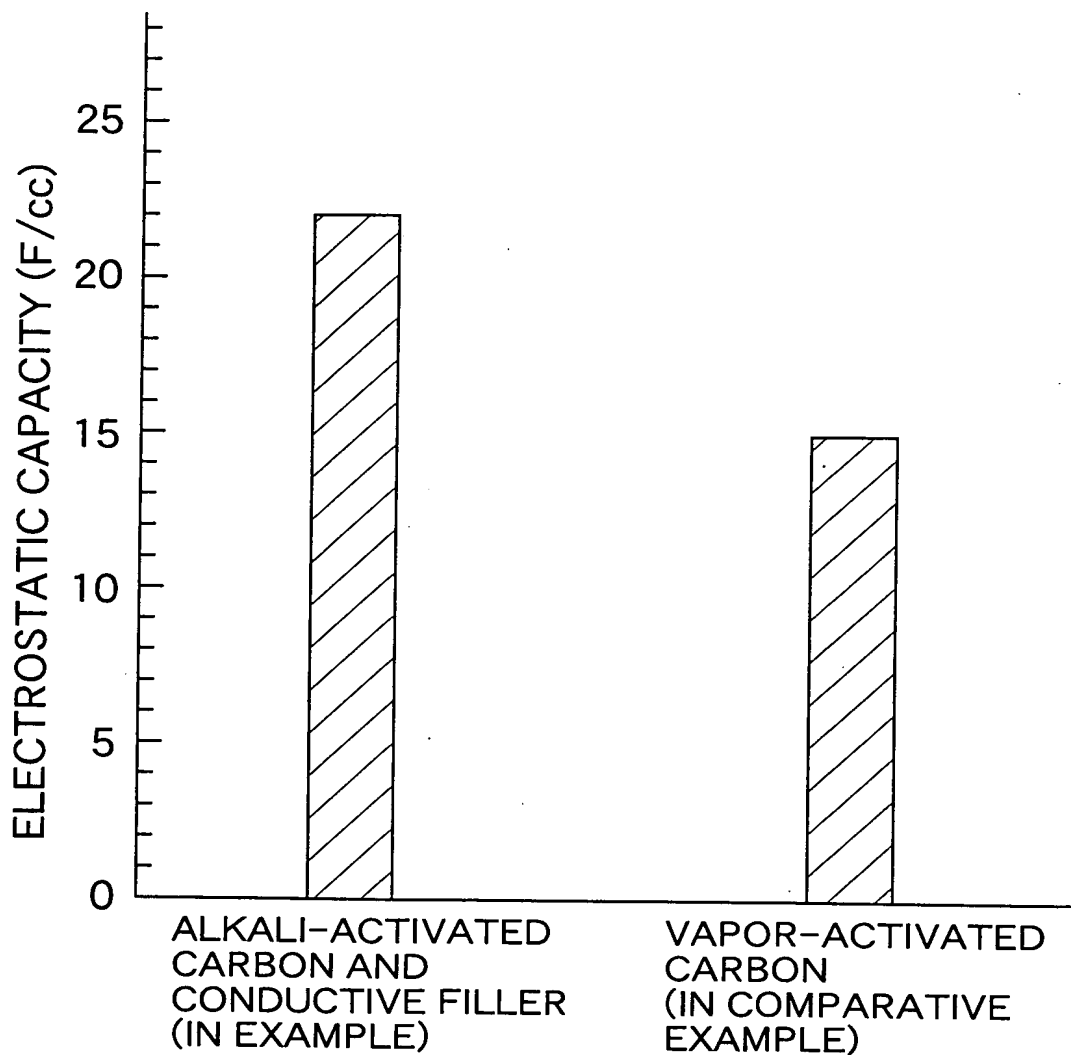


006080" SE25E960

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		


006080" 5E25E960

FIG.7

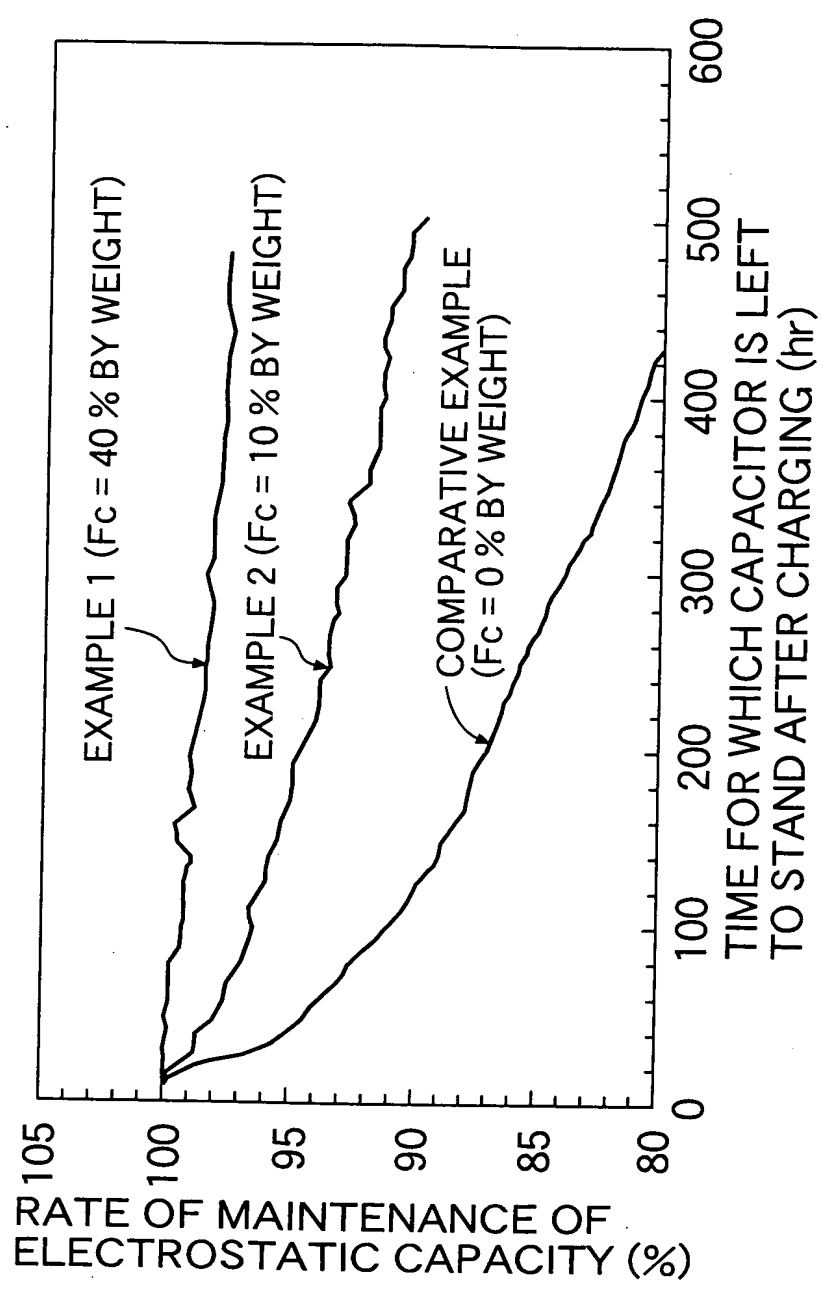

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

FIG.8

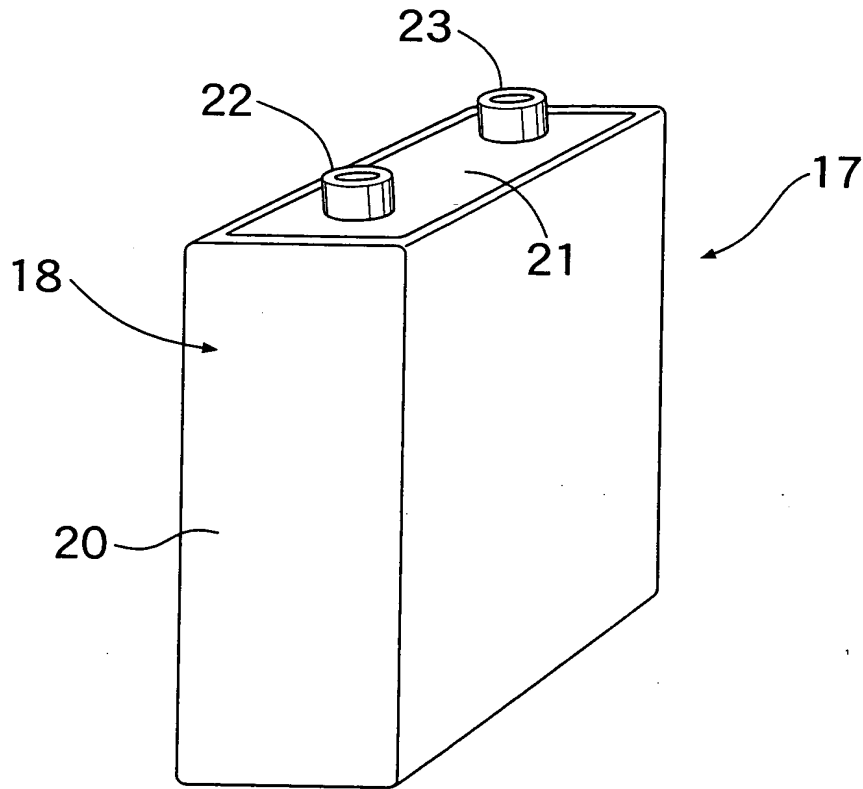

006080" SEC25C960

006080" SE25E960

FIG. 9


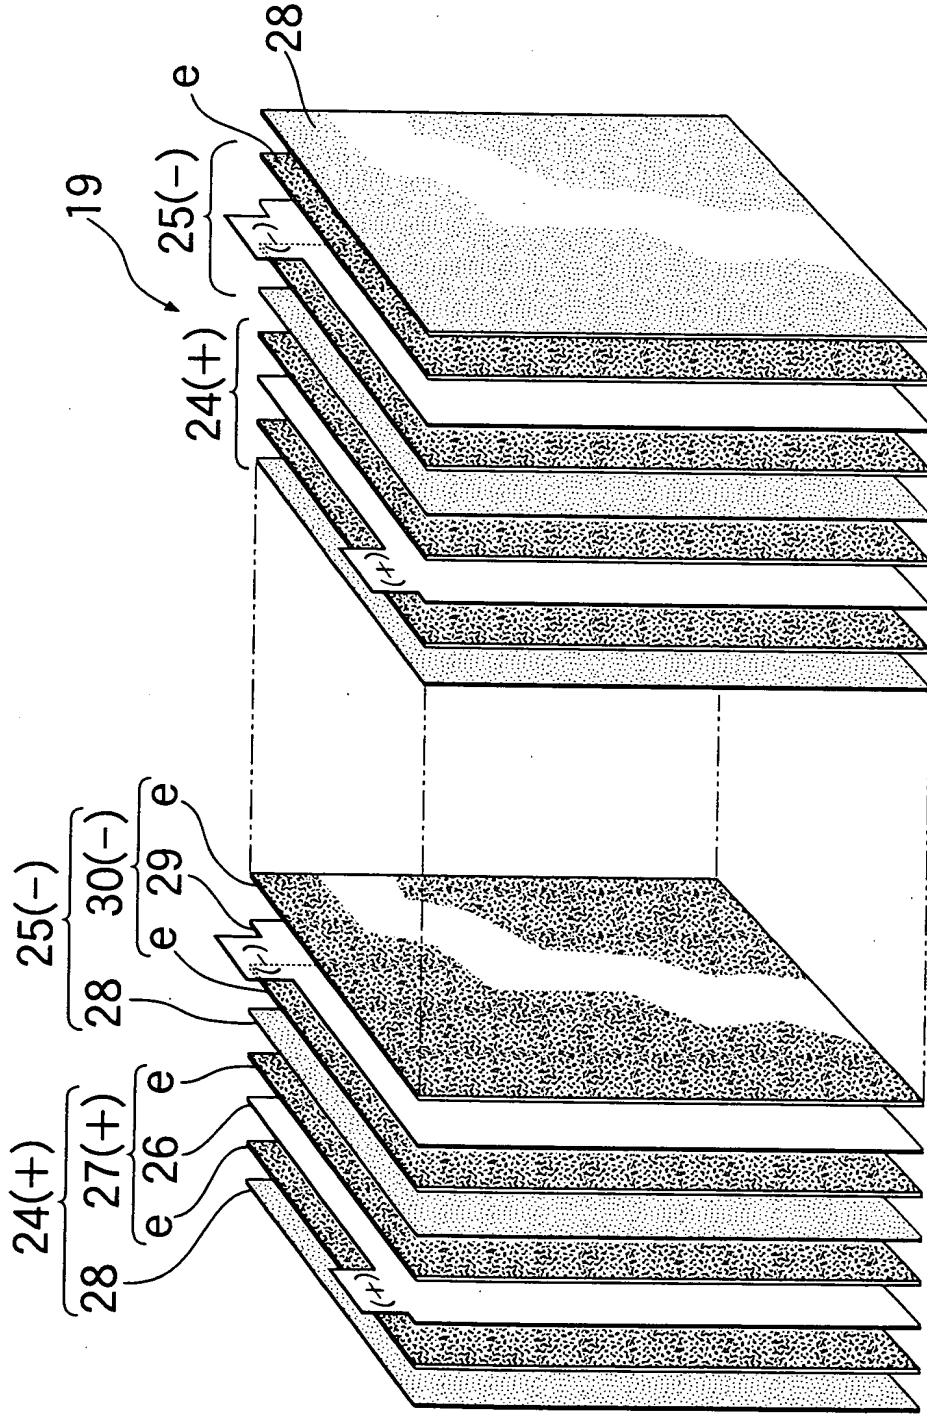


FIG.10

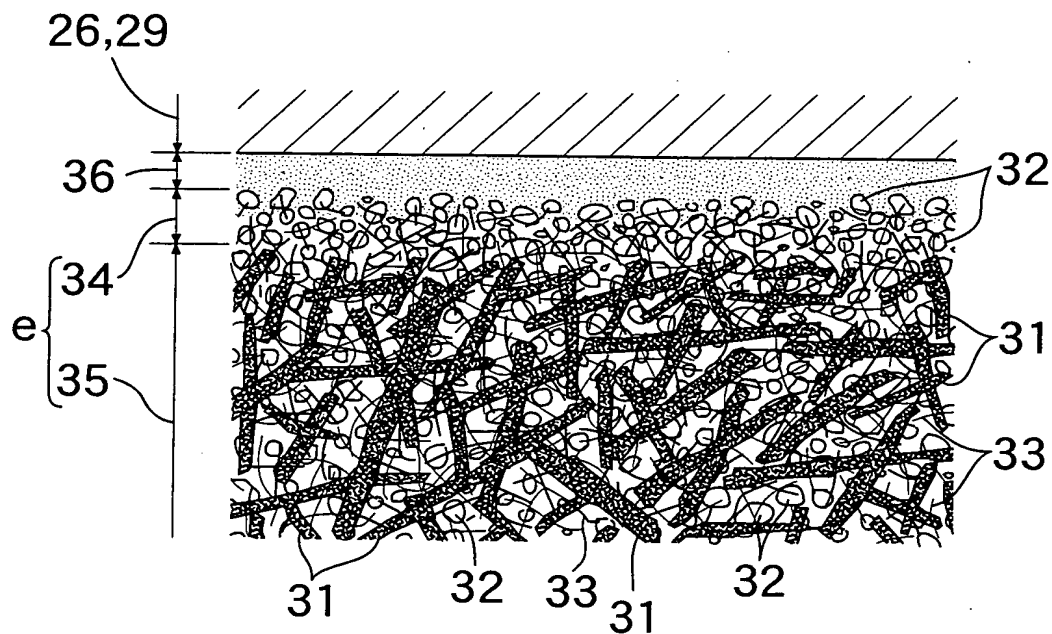


Surface

body

006080-5E25E960

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

FIG.11

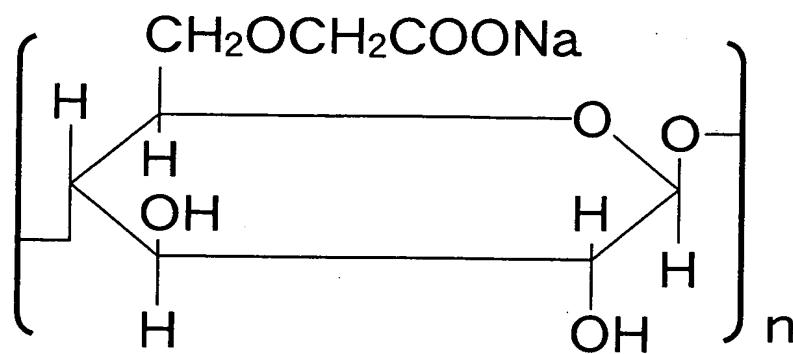

$n$  : DEGREE OF POLYMERIZATION

006080-5255960